


OPERATION MANUAL

AUTOMATIC TRANSFER SWITCH
UNIT

SPX-61



AUTOMATIC TRANSFER SWITCH UNIT

SPX-61

DESCRIPTION

The ASHE SPX-61 Automatic Transfer Switch is a microcontroller based power switching unit. The instrument is used as a watchdog for the mains power line feeders in industries so as to ensure smooth and uninterrupted power availability to critical process equipment.

The Automatic Transfer Switch accepts two single phase power feeders as input lines. Depending upon the preset settings, the SPX-61 switches one of the two input feeders to the output, i.e., it provides a selection of one primary feeder out of two input power feeders. Further it monitors the voltage and current continuously and displays the values on the front digital display. The instrument has a membrane switch pad on the front panel to set all parameters. An active LED mimic gives a direct indication of the status of the input and output signals.

The ASHE SPX-61 has automatic recovery features. After a power shut down, when power supply is restored, it automatically returns precedence to the primary power feeder. Further it ascertains that the input voltage is within healthy limits before allowing transfer to the output. The Power Switching unit is slim and aesthetically designed and consumes minimal panel space. It is available in 19 inch rack execution in 3U height

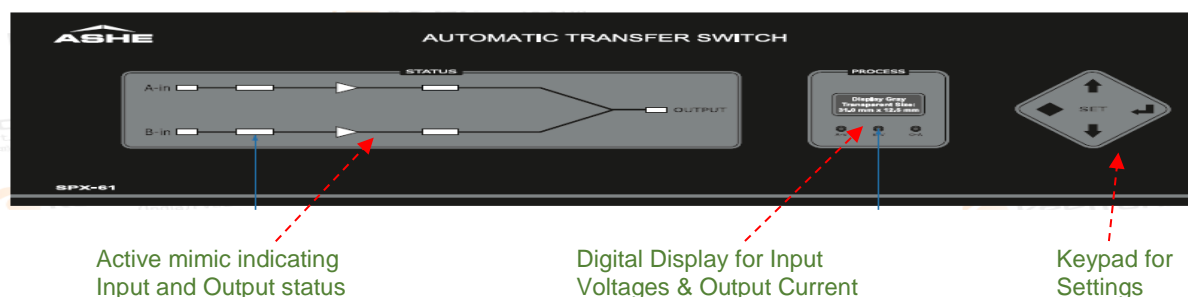
All ASHE range of products carry a five year performance warranty.

INSTALLATION

The instrument is available in a standard 19" Rack design with height of 3U so as to occupy minimal panel space [See *TECHNICAL SPECIFICATIONS*]. All interconnections to the instrument should be made with strong multi-strand wire of the order of 10 sq.mm. The ends of the wires should be properly ferruled and suitable lugs must be used for effective termination. The Relay contacts are potential free and any desired voltage may be used in conjunction with the same.

OPERATION & SETTINGS

The front panel of the Static Power Switching unit SPX-61 is as shown below:



Digital Display: Three-digit seven-segment digital display indicates the AC Voltage of INPUT-A, AC Voltage of INPUT-B and the Output load Current.

LED indications:





1. **A-V** : Indicates the reading on display is of INPUT-A
2. **B-V** : Indicates the reading on display is of INPUT-B
3. **O-A** : Indicates the reading on display is of load current

Status LEDs:





Active LED mimic for status indications of input source and output current

CONTROL KEYS

The instrument has four keys on the front panel, functions of which are described below

	The PROGRAM key is the central coordinating key to access the settings of the instrument. Pressing this Key allows the operator to sequentially view, change and save the control parameters.
	The INC or Increment key allows the operator to select the numeral in the digit being set on an increasing scale. The digit will sequentially display 0, 1, 2....9 on each pressing of the INC key. The incrementing speed increases if the key is kept pressed.
	The DEC or Decrement key allows the operator to select the numeral in the digit being set on a decreasing scale. The digit will sequentially display 9, 8, 7....1 on each pressing of the DEC key. The decrementing speed increases if the key is kept pressed.
	Not in use in this model.

CONTROL SETTINGS

KEY Pressed	DIGITAL DISPLAY	FUNCTION
(POWER ON)	Scanned Process Values	The instrument sequentially scans and displays the AC Voltage of Input-A, AC Voltage of Input-B and the output load Current on the seven-segment digital displays.
PROG 	SrC	SrC stands for Primary Source. The user can select INPUT-A or INPUT-B as the primary source (for precedence). By default, INPUT-A is accorded the Primary Source.
PROG 	Bnd	Bnd stands for the Input Voltage Band. This level defines the permitted voltage variation band to be recognized as a valid Input Voltage. The default value is 30 V, i.e., for a 230 VAC supply, the voltage limits will be 200 to 260V [$230-30=200\text{V}$ and $230+30=260\text{V}$ AC). / The voltage limit will be 80 to 140V [$110-30 = 80\text{V}$ and $110 + 30 = 140\text{VAC}$].
PROG 	r-t	r-t stands for Recovery Time. The default value is 10 seconds. e.g., If Primary Source is INPUT-A, and there is a failure in Input A, the power source will be seamlessly switched to INPUT-B. As soon as INPUT-A is restored, the SPX-61 checks the voltage level for 10 seconds, and if it is found healthy, then the Input source is switched back to INPUT-A.
PROG 	Scanned Process Values	The instrument comes out of Control Setting mode and displays the process values on digital display. Also the source & status of the Input and Output voltages are indicated on the active LED mimic

Relay Function:

During power switching from one input to the other input, the Relay will energize for 5 seconds, after which period it will de-energize.

TERMINAL DIAGRAM

RELAY			OUTPUT			INPUT – A			INPUT – B		
NO	C	NC	L	N	E	L1	N1	E1	L2	N2	E2
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
10	11	12	1	2	3	4	5	6	7	8	9

TERMINAL DETAILS

TERMINAL NO.	NOTATION	DETAILS
1	L	OUTPUT VOLTAGE
2	N	
3	E	
4	L1	INPUT VOLTAGE – A
5	N1	
6	E1	
7	L2	INPUT VOLTAGE – B
8	N2	
9	E2	
10	NO	RELAY CONTACTS
11	C	
12	NC	

TECHNICAL SPECIFICATIONS

Model	:	SPX-61.
Type	:	Microcontroller based power switching unit.
Input Signal	:	Two nos. AC voltage inputs (single-phase)
Output signal	:	One AC voltage output (depending on input status).
Voltage Input-A	:	110 VAC, (45 Hz to 65Hz).
Voltage Input-B	:	110 VAC, (45Hz to 65Hz).
Switching current	:	Upto 61 Ampere.
Control Setting parameters	:	Primary Voltage source selection, Range for voltage watch-dog, Input Recovery time.
Relay output	:	Single Relay c/o contacts (potential free).
Contact Rating	:	10 Ampere @ 230 VAC.
Indications	:	3-digit seven-segment LED display for Input /Output Voltage and Current indications and Menu selection Active LED mimic for status indications of input sources and output voltage.
Settings	:	By four-key membrane switchpad on front panel.
Switching devices	:	SSR Based.
Memory	:	Non-Volatile (on EEPROM).
Enclosure	:	Standard 19" Rack compatible 3U enclosure
M.O.C.	:	Extruded Aluminum fabricated housing.
Dimensions	:	130H x 483W x 300D mm.
Weight	:	Approximately 9 kgs
Ambient Temp.	:	0 to 50°C.

.....oooOooo.....